




Drill Solutions

INSIDE AIR ROTARY (Portable Inside Drilling)

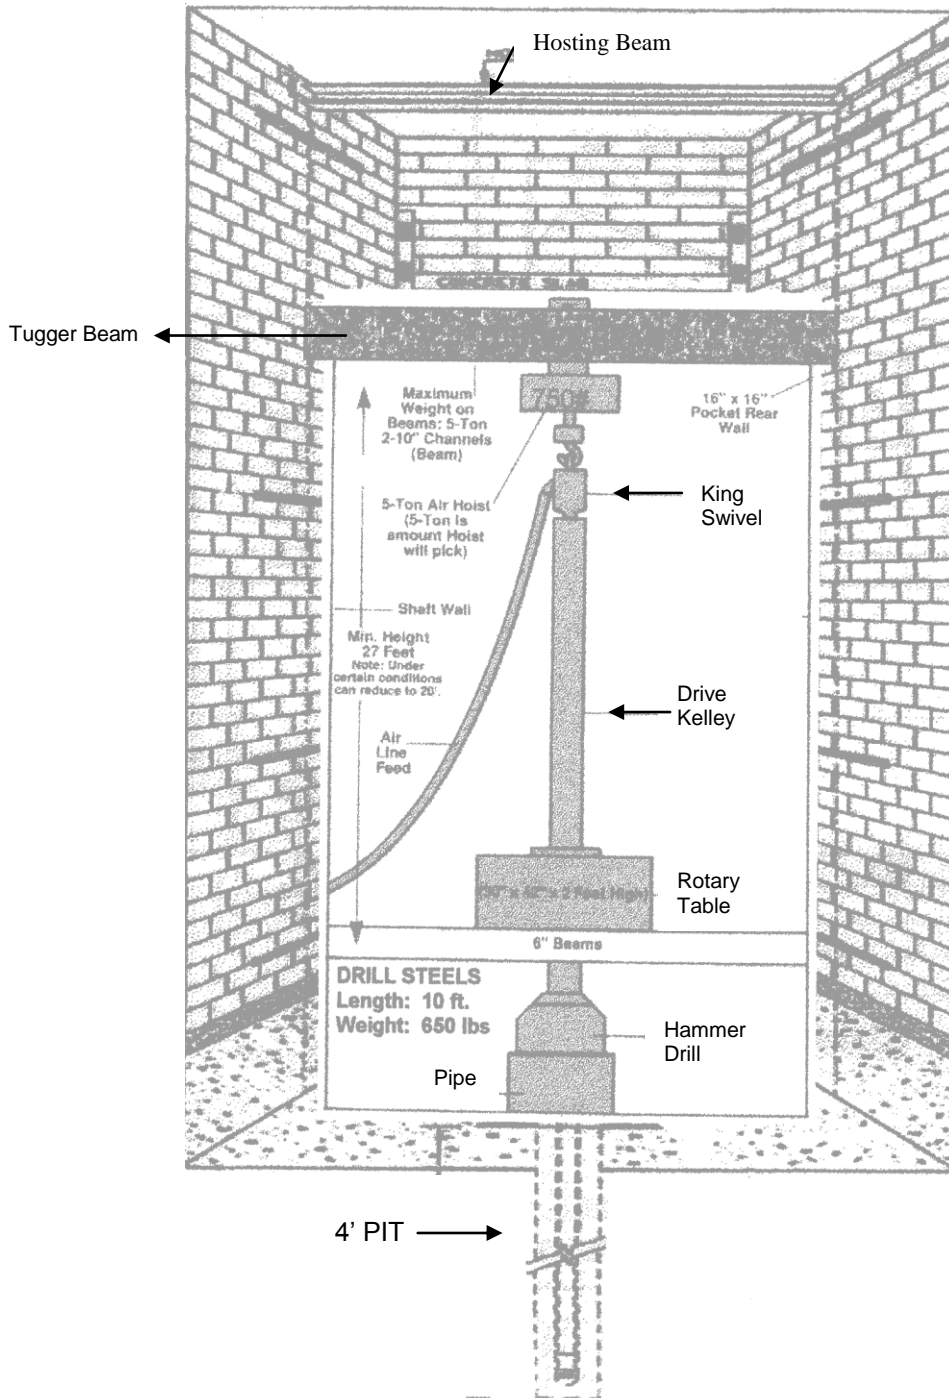

Note: If hoisting beam is unable to support 5-ton, walls will be pocketed and our tugger beam installed. Please notify office if existing hoisting beam is unable to support 5-ton maximum.

- **Openings required:**
Standard: 36"
Height: 6'8"
(Possible to access through smaller openings under certain conditions.)
- **Does not use rails, but rails may be installed.**
- **Equipment sets up directly in hatch.**
- **Equipment powered by air utilizing 1600 CFM Whisperized Air Compressor.**
- **Down Hole Hammer Weight:**
17" Bit = 2000 lbs
19" Bit = 2500 lbs